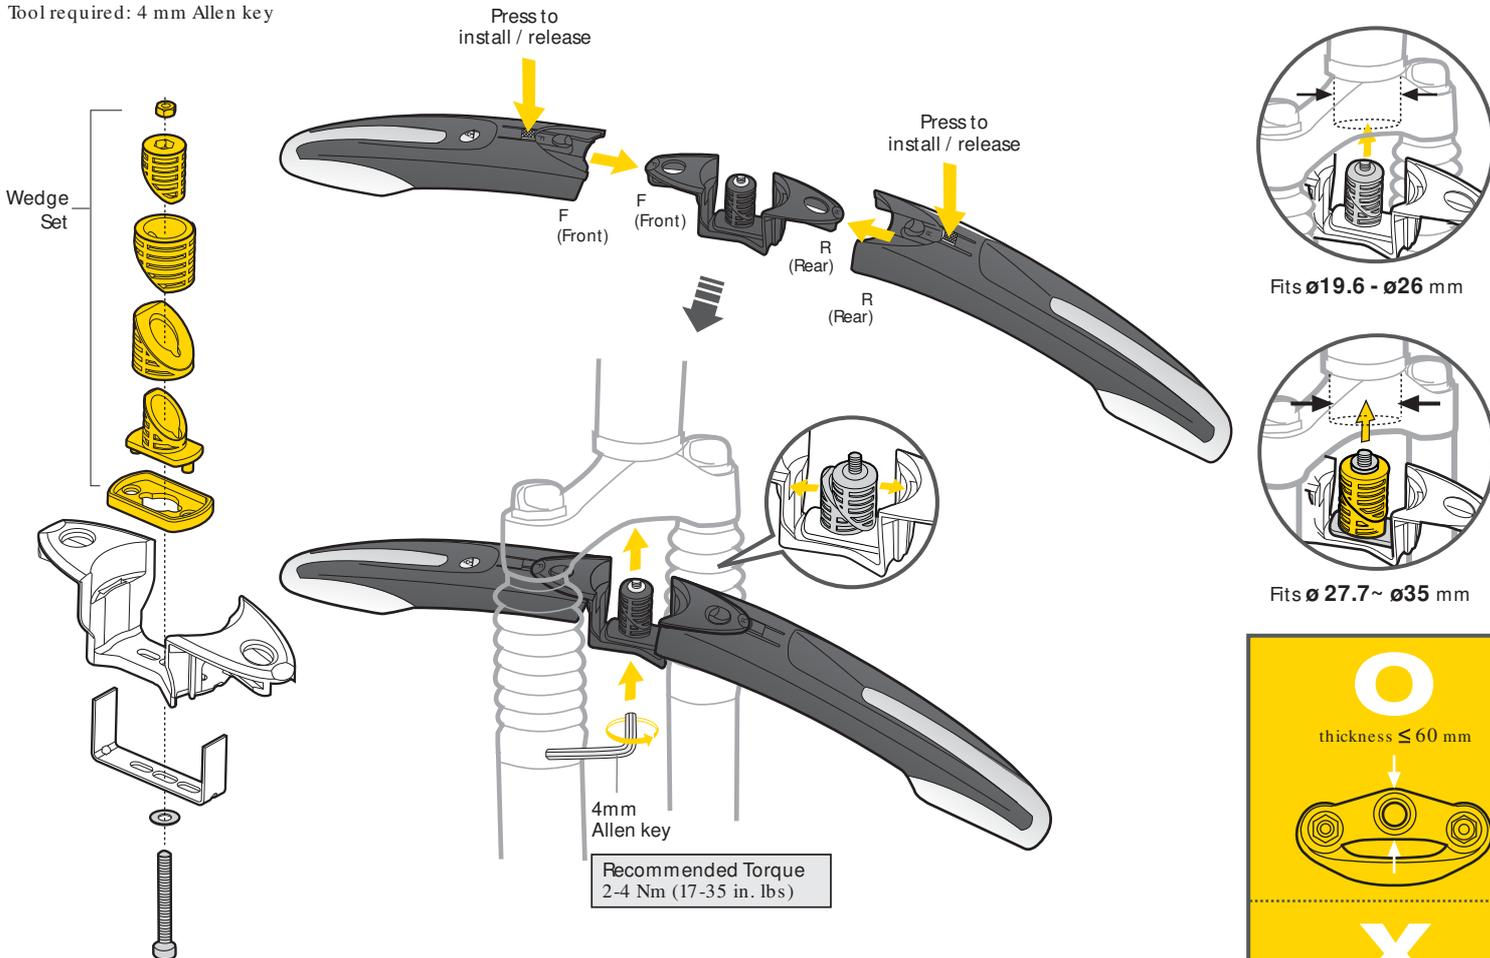


### DeFender M1

Tool required: 4 mm Allen key



 Fits  $\varnothing 19.6 - \varnothing 26$  mm

 Fits  $\varnothing 27.7 \sim \varnothing 35$  mm


thickness &gt; 60 mm



DeFender M1 fits most standard front forks. However, it will not fit forks with a crown thickness over 60 mm (2.36") and is not designed to be used with the 1.5" headset standard.


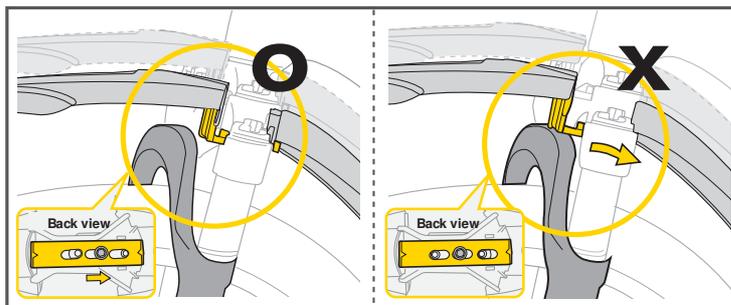


#### CAUTION:

When installing DeFender M1 with suspension forks, make sure no part of the fork comes in contact with the DeFender M1 during its travel length. Otherwise damage to your bike or DeFender M1 may occur and it may also cause bodily injury.

### DeFender M1

#### IMPORTANT NOTES

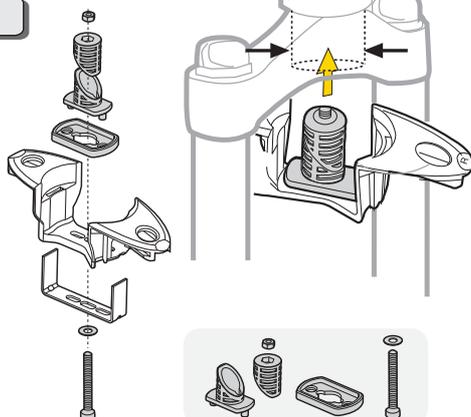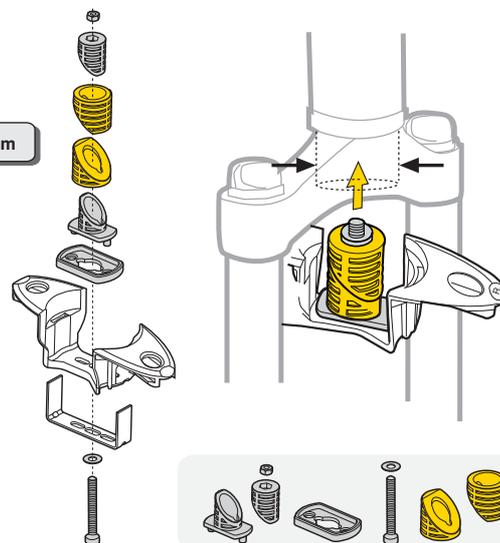
 Fits  $\varnothing 19.6 \sim \varnothing 26$  mm

 Fits  $\varnothing 27.7 \sim \varnothing 35$  mm


### DeFender M2

Tool required: 4 mm Allen key

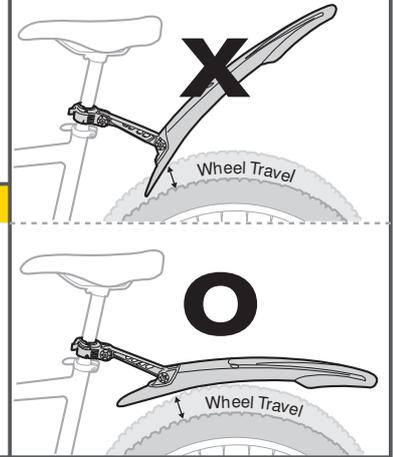



For Rear Suspension Bike





#### WARNING

When adjusting the angle of DeFender M2, make sure the space between DeFender M2 and the tire is larger than wheel travel of the bike. Incorrect angle may cause damage to DeFender M2, your bike, or potentially cause bodily harm.

SLIP JOINT CLAMP FITS  $\varnothing 25.4 \sim \varnothing 31.2$  mm and  $\varnothing 30.8 \sim 34.9$  mm

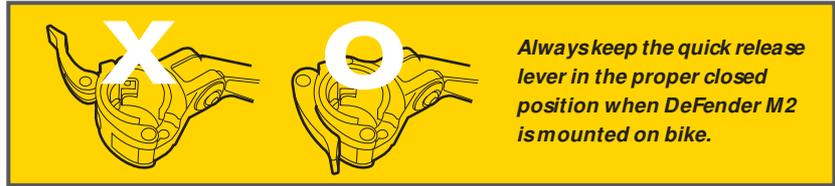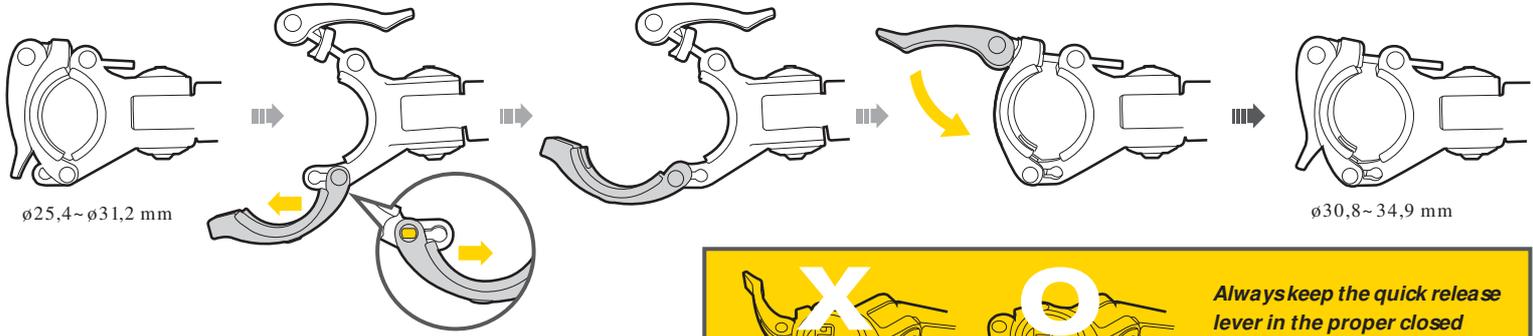

### ANGLE ADJUSTMENT

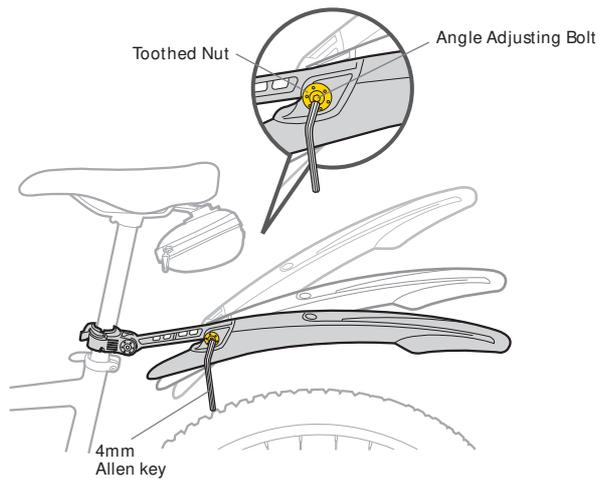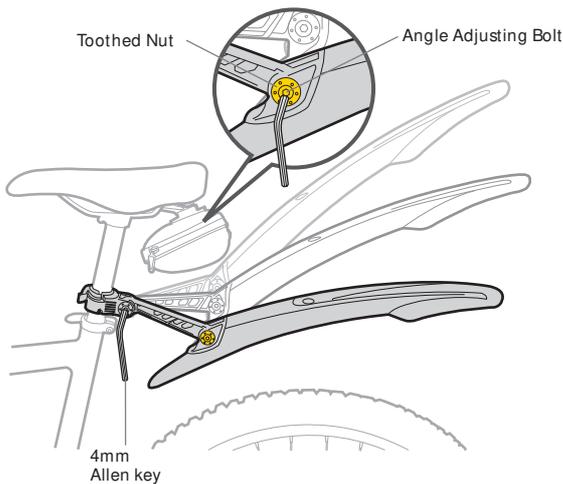

#### WARNING

Adjust the angle of DeFender M2 by loosening the angle adjusting bolts and retightening the bolts once the correct angle is achieved. Do not loosen the angle adjusting bolt more than 6 counterclockwise rotations or the toothed nut assembly will be disassembled and may be damaged.

Recommended Torque:  
2-4 N.m (17~35 in. lbs.)

### WARRANTY

2-year Warranty: All mechanical components against manufacturer defects only.

#### Warranty Claim Requirements

To obtain warranty service, you must have your original sales receipt. Items returned without a sales receipt will assume that the warranty begins on the date of manufacture. All warranties will be void if the product is damaged due to user crash, abuse, system alteration, modification, or used in any way not intended as described in this operating manual.

\* The specifications and design are subject to change without notice.

Topeak products are available only from professional bicycle shops.

Please contact your nearest Topeak authorized bicycle dealer for any questions. For customers in the USA, call: 1-800-250-3068, Website: [www.topeak.com](http://www.topeak.com)